I-Q Code Multiplexing

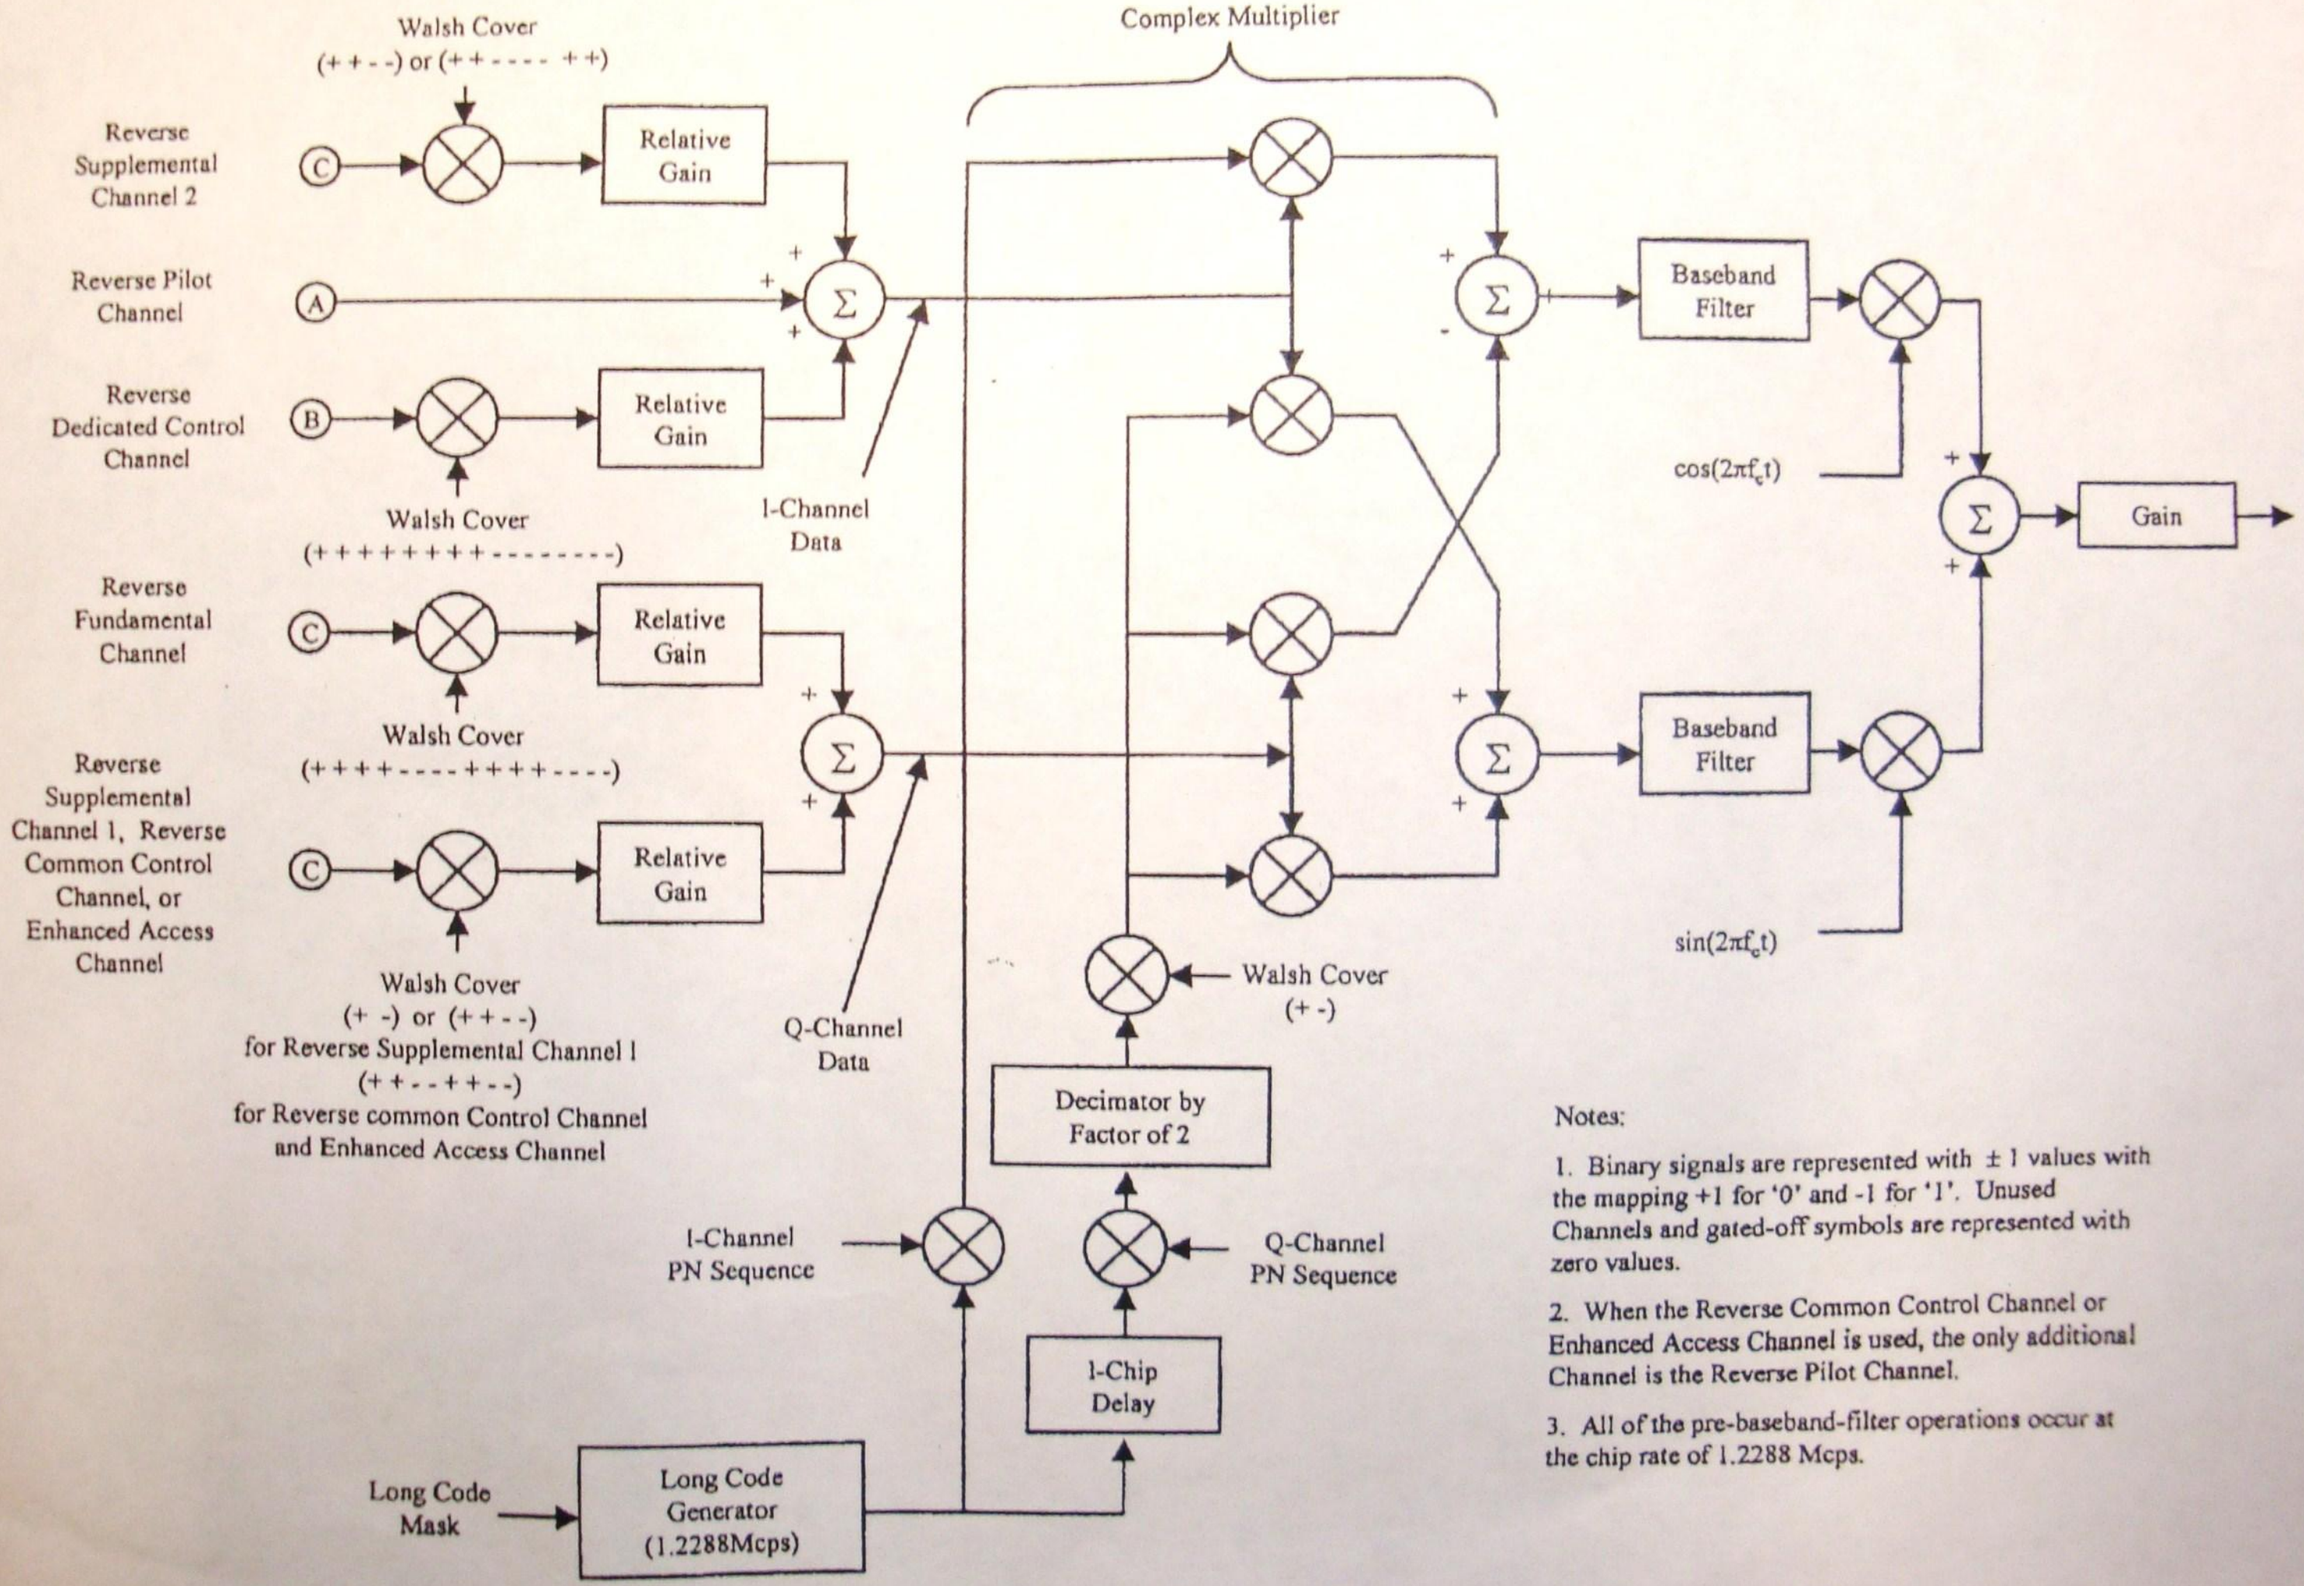

Notes:

1. Binary signals are represented with ± 1 values with the mapping +1 for '0' and -1 for '1'. Unused Channels and gated-off symbols are represented with zero values.

2. When the Reverse Common Control Channel or Enhanced Access Channel is used, the only additional Channel is the Reverse Pilot Channel.

3. All of the pre-baseband-filter operations occur at the chip rate of 1.2288 Mcps.